


**SMALL TYPE – ELECTRICALLY HEATED AIR CURTAINS**  
100 mm cross flow fan



# Mini-800s

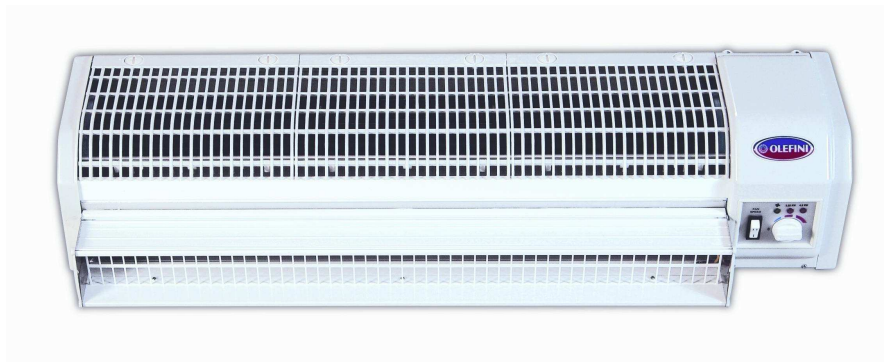

**Small size (mini), Low Cost Air Curtains for commercial and on some occasions Residential use, equipment with Stitched Wire Heating Elements**

## **For use in :**

- **Small Shops**
- **Bars**
- **Cafeterias**
- **Small Hotels**
- **Banks**
- **Schools**
- **Super markets**



## SMALL TYPE – **ELECTRICALLY HEATED** AIR CURTAINS

### 100 mm cross flow fan




Air Curtain mini – 800s is capable of covering openings of 0.8 m long

### Technical Details

|                                    |          |
|------------------------------------|----------|
| Max Door Height (m)                | 2.3      |
| Max Door Width (m)                 | 0.8      |
| Max Air Velocity (m/sec)           | 5.0/7.0  |
| Max Air Volume (m <sup>3</sup> /h) | 720/1050 |
| Motor Power (W)                    | 120      |
| Capacitor (μF)                     | 4        |
| Max Current Cons.                  | 20 A     |
| Power Supply                       | 230/50/1 |
| Heating stages                     | 3        |
| Thermal Power (Kw)                 | 4.5      |
| Sound level in 1m dB (A)           | 58/60    |
| Weight (Kg)                        | 10       |

### Dimensions

|                  |            |
|------------------|------------|
| A: Total Length  | 810±1 (mm) |
| B: Total Width   | 166 (mm)   |
| C: Height        | 172 (mm)   |
| D: Outlet Length | 668 (mm)   |
| E: Outlet Width  | 60 (mm)    |
| H: Outlet Height | 64 (mm)    |

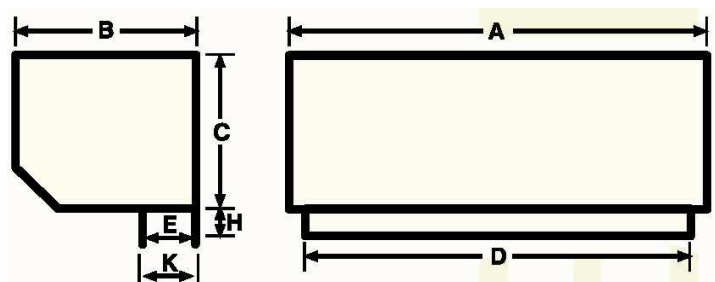

**SMALL TYPE – ELECTRICALLY HEATED AIR CURTAINS**  
**100 mm cross flow fan**



## **Standard operation**

- HI – LOW switch for motor speed selection
- Rotary switch for :
  - ON-OFF motor operation
  - 50% - 100% Heating Power Selection

